


ADT-CNC4A EL ÇARKI

- Kasa Ölçüleri: 180 × 72 × 30 mm (Boy × En × Derinlik)
- Kablo boy: 3 metre



Bağlantı Şeması

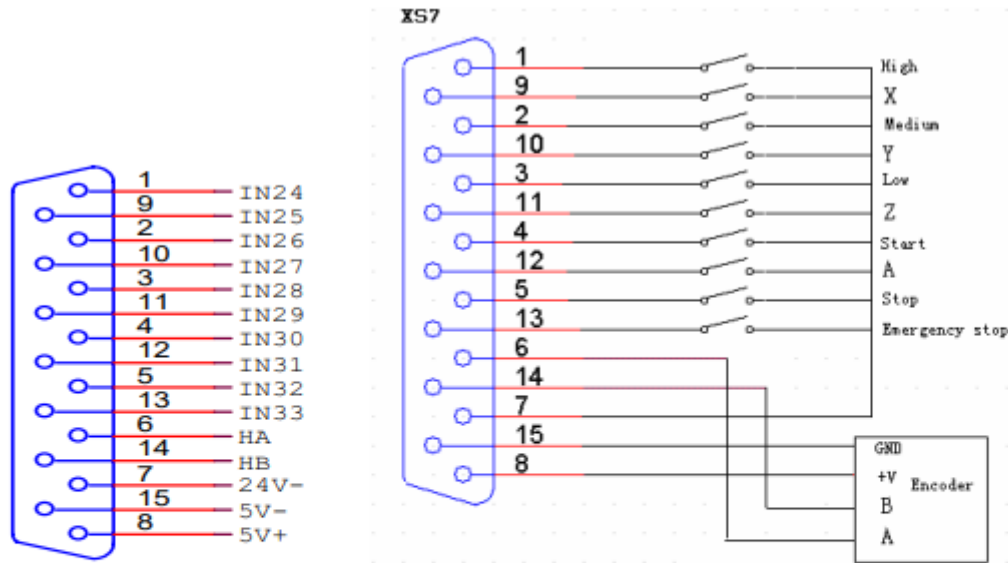

Wire No.	Definition	Function
1	(IN24) gear switch	0.1 gear --- High speed
2	(IN26) gear switch	0.01 gear --- Medium speed
3	(IN28) gear switch	0.001 gear --- Low speed
4	(IN30) button	Cycle start
5	(IN32) button	Emergency stop
7	24V-	Negative pole of internally provided 24V power supply
9	(IN25) axis selection	X axis
10	(IN27) axis selection	Y axis
11	(IN29) axis selection	Z axis
12	(IN31) axis selection	A axis
13	(IN33) button	Emergency stop
6	HA	Hand encoder phase A input signal
14	HB	Hand encoder phase B input signal
15	5V-	Negative pole of internally provided 5V power supply
8	+5V	Positive pole of internally provided 5V power supply
7	24V-	Negative pole of internally provided 24V power supply