

Absolute encoders – multiturn

**Standard
electronic multiturn, magnetic**


Sendix M5863 (shaft)

SSI



The Sendix M58 with Energy Harvesting Technology is an electronic multiturn encoder without gear and without battery – in the standard format with 58 mm flange.

High robustness and high resolution make this encoder the ideal device for use in demanding applications.

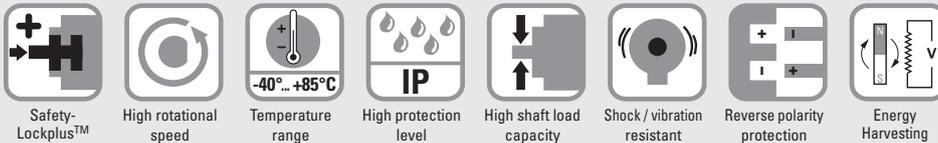

Highest robustness

- Sturdy bearing construction in Safety-Lockplus™ design for particularly high resistance.
- Extra large bearings.
- Mechanically protected shaft seal.
- Wide temperature range -40°C ... +85°C.
- Without gear and without battery, thanks to the Energy Harvesting technology.

Application oriented

- Absolute accuracy $\pm 1^\circ$.
- Repeat accuracy $\pm 0.2^\circ$.
- Short control cycles, clock frequency with SSI up to 2 MHz.
- Max. resolution 38 bit (14 bit ST + 24 bit MT).

Order code 8.M5863 .X.X2X.XXX2
Shaft version Type

- | | | |
|--|---|--|
| <p>a Version
3 = clamping flange, IP65, \varnothing 58 mm [2.28"]
4 = synchro flange, IP65, \varnothing 58 mm [2.28"]</p> <p>b Shaft ($\varnothing \times L$), with flat
1 = \varnothing 6 x 12.5 mm [0.24 x 0.49"]
5 = \varnothing 10 x 20 mm [0.39 x 0.79"]</p> <p>c Interface / power supply
2 = SSI / 10 ... 30 V DC</p> | <p>d Type of connection
2 = radial cable, 1 m [3.28'] PUR
B = radial cable, special length PUR *)
4 = radial M12 connector, 8-pin</p> <p>*) Available special lengths (connection types B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.M5863.3524.G322.0030 (for cable length 3 m)</p> <p>e Code
B = SSI, binary
G = SSI, gray</p> | <p>f Resolution (singleturn)
A = 10 bit ST
2 = 12 bit ST
3 = 13 bit ST
4 = 14 bit ST</p> <p>g Resolution (multiturn)
2 = 12 bit MT
6 = 16 bit MT
A = 20 bit MT
4 = 24 bit MT</p> |
|--|---|--|

Optional on request
- Ex 2/22 (only for connection type 4)

Connection technology		Order no.
Coupling	Bellows coupling \varnothing 19 mm [0.75"] for shaft 10 mm [0.39"]	8.0000.1102.1010
Connection technology		Order no.
Cordset, pre-assembled	M12 female connector with coupling nut, 8-pin, 2 m [6.56'] PUR cable	05.00.6051.8211.002M
Connector, self-assembly (straight)	M12 female connector with coupling nut, 8-pin	05.CMB 8181-0

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
 Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Absolute encoders – multiturn

Standard electronic multiturn, magnetic	Sendix M5863 (shaft)	SSI
--	-----------------------------	------------

Technical data

Mechanical characteristics

Maximum speed		4000 min ⁻¹ 2000 min ⁻¹ (continuous)
Starting torque at 20°C [68°F]		< 0.01 Nm
Shaft load capacity	radial axial	80 N 40 N
Weight		approx. 0.2 kg [7.06 oz]
Protection acc. to EN 60529/DIN 40050-9		IP65
Working temperature range		-40°C ... +85°C [-40°F ... +185°F]
Materials	shaft flange housing cable	V2A aluminum zinc die-cast PUR
Shock resistance acc. to EN 60068-2-27		5000 m/s ² , 4 ms
Vibration resistance acc. to EN 60068-2-6		300 m/s ² , 10 ... 2000 Hz

Electrical characteristics

Power supply		10 ... 30 V DC
Current consumption (no load)		max. 30 mA
Reverse polarity protection of the power supply		yes
Short-circuit proof outputs		yes ¹⁾
CE compliant acc. to		EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

SSI interface

Output driver		RS485 transceiver type
Permissible load / channel		max. +/- 30 mA
Signal level	HIGH LOW with I _{Load} = 20 mA	typ 3.8 V typ 1.3 V
Resolution singleturn		10 ... 14 bit
Absolute accuracy²⁾		±1°
Repeat accuracy		±0.2°
Number of revolutions (multiturn)		max. 24 bit
Code		binary or gray
SSI clock rate		50 kHz ... 2 MHz
Data refresh rate		2 ms
Monoflop time		≤ 15 μs

Note: If the clock cycle starts within the monoflop time a second data transfer begins with the same data. If the clock cycle starts after the monoflop time the cycle begins with the new values. The update rate is dependent on the clock speed, data length and monoflop time.

SET input

Input		active HIGH
Input type		comparator
Signal level	HIGH LOW	min. 60 % of +V, max: +V max. 30 % of +V
Input current		< 0.5 mA
Min. pulse duration (SET)		10 ms
Input delay		1 ms
New position data readable after		1 ms
Internal processing time		200 ms

The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms, after which the new position data can be read via SSI or BiSS. Once the SET function has been triggered, the encoder requires an internal processing time of typ. 200 ms; during this time the power supply must not be switched off.

The SET function should be carried out whilst the encoder is at rest.

The number of preset value writing cycles is limited to 10,000.

If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.

DIR input

Direction input: A HIGH signal switches the direction of rotation from the default cw to ccw. This inverted function can also be factory-programmed.

If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.

Response time (DIR input)	1 ms
----------------------------------	------

Power-ON

After Power-ON the device requires a time of approx. 150 ms before valid data can be read.

Hot plugging of the encoder should be avoided.

1) Short circuit proof to 0 V or to output when power supply correctly applied.

2) Over the whole temperature range.

Absolute encoders – multiturn

Standard electronic multiturn, magnetic	Sendix M5863 (shaft)	SSI
--	-----------------------------	------------


Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused cores individually before initial start-up)									
2	2, B	SET, DIR	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	⊥
			Core color:	WH	BN	GN	YE	GY	PK	BU	RD	shield

Interface	Type of connection	Features	M12 connector, 8-pin									
2	4	SET, DIR	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	⊥
			Pin:	1	2	3	4	5	6	7	8	PH

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- C+, C-: Clock signal
- D+, D-: Data signal
- SET: Set input
- DIR: Direction input
- PH ⊥: Plug connector housing (shield)

Top view of mating side, male contact base



M12 connector, 8-pin



Dimensions

Dimensions in mm [inch]

Clamping flange, ø 58 [2.28] Flange type 3

- 1 3 x M4, 10 [0.39] deep
- 2 3 x M3, 6 [0.24] deep

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
10 [0.39]	f7	20 [0.79]

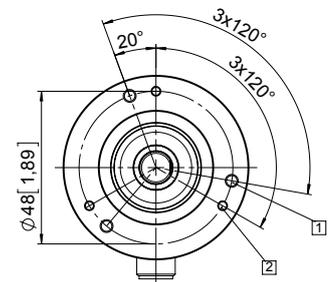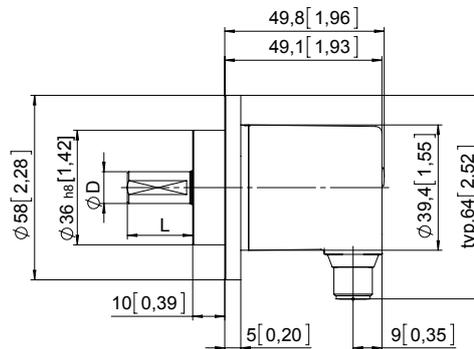

Synchro flange, ø 58 [2.28] Flange type 4

- 1 3 x M4, 10 [0.39] deep

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
10 [0.39]	f7	20 [0.79]

