

BK5

BLIND MATE WITH CLAMPING HUB 15 - 1,500 Nm

PROPERTIES

FEATURES

- ▶ easy installation and removal
- ▶ electrically and thermally isolating
- ▶ absolutely backlash free assembly


- ▶ **Tapered male segment:** high strength plastic

MATERIAL

- ▶ **Bellows:** high grade stainless steel
- ▶ **Hubs:** up through size 80 Aluminum, size 150 and up steel

DESIGN

Two clamping hubs, one of which has a tapered male projection for blind mate connection. Brief overloads of up to 1.5x the rated torque are acceptable.

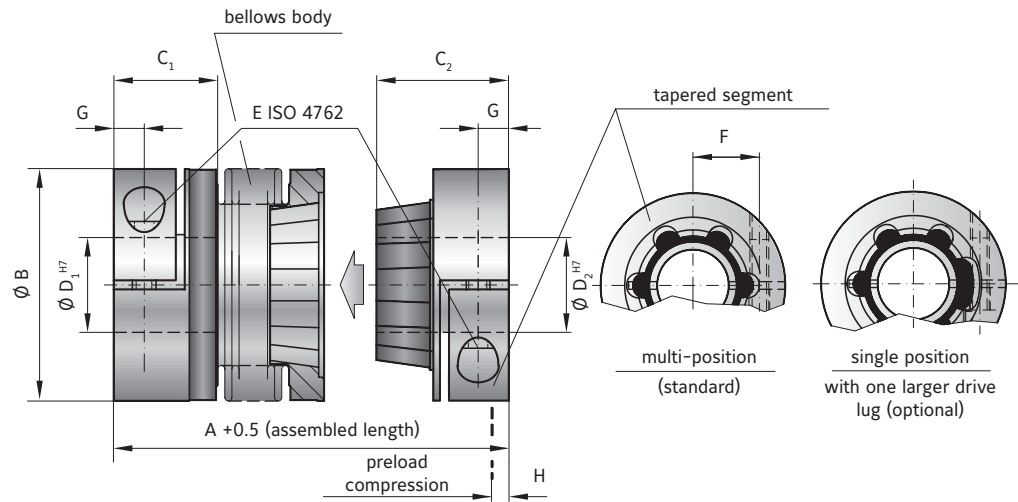

BELLOWS COUPLINGS BK

MODEL BK5

SIZE			15		30		60		80		150		300		500		800		1500	
Rated torque (Nm)	T_{KN}		15		30		60		80		150		300		500		800		1500	
Overall length (inserted) (mm)	$A^{+0.5}$		60	67	71	79	85	95	94	106	95	107	114	128	136	149	150	176		
Outside diameter (mm)	B		49		55		66		81		81		110		124		133		157	
Fit length (mm)	C_1		22		27		31		36		36		43		51		45		55	
Fit length (mm)	C_2		28		33		39		43		43		52		61		74		94	
Inside diameter possible from \emptyset to \emptyset H7 (mm)	D_1		8-28		10-30		12-35		14-42		14-42		24-60		35-60		40-75		50-80	
Inside diameter possible from \emptyset to \emptyset H7 (mm)	D_2		8-22		10-25		12-32		14-38		14-38		24-58		35-60		40-62		50-75	
Fastening screw ISO 4762			M5		M6		M8		M10		M10		M12		M16		2 x M16**		2 x M20**	
Tightening torque of the fastening screw (Nm)	E		8		15		40		50		70		130		200		250		470	
Distance between centerlines (mm)	F		17		19		23		27		27		39		41		2 x 48**		2 x 55**	
Distance (mm)	G		6.5		7.5		9.5		11		11		13		16.5		18		22.5	
Preload compression (mm)			0.2 - 1.0		0.5 - 1.0		0.5 - 1.5		0.5 - 1.5		0.5 - 1.5		0.5 - 1.5		1.0 - 2.0		1.0 - 2.5		0.5 - 1.5	
Axial recovery force at maximum pretensioning (N)	H		20	12	50	30	70	45	48	32	82	52	157	106	140	96	200		650	
Moment of inertia (10^{-3} kgm ²)	J_{ges}		0.07	0.08	0.14	0.15	0.23	0.26	0.65	0.67	2.2	2.4	7.4	7.9	13.7	14.4	21.5		51.4	
Approximate weight (kg)			0.1	0.1	0.3	0.3	0.4	0.4	0.9	0.9	1.8	1.8	4	4	6.5	6.7	9		15.3	
Torsional stiffness (10^3 Nm/rad)	C_T		10	8	20	14	38	28	65	43	88	55	225	175	255	245	400		650	
Axial* \pm (mm)			0.5	1	0.5	1	0.5	1	1	2	1	2	1.5	2	2.5	3.5	3		2	
Lateral \pm (mm)			0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.25	0.2	0.25	0.25	0.3	0.3	0.35	0.35		0.35	
Angular \pm (degree)			1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1.5		1.5	
Lateral spring stiffness (N/mm)	C_L		475	137	900	270	1200	420	920	290	1550	435	3750	1050	2500	840	2000		3600	

*in addition to maximum allowable pretension **180° opposed in each clamping hub.

ORDERING EXAMPLE	BK5	30	71	18	19	XX
Model	●					
Size		●				
Overall length mm				●		
Bore D1 H7					●	
Bore D2 H7						●
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK5 / 30 / 71 / 18 / 19 / XX; XX=finely balanced for 25,000 rpm)						